



Product Data Sheet (2015-12-23)



Flexconsole

Advantages

With the Flexconsole, the Flexcon vessel is set up vertically, fitted to the water connection, with the water nipple fitted on connection B of the console and the expansion pipe fitted to connection A. Equipped with a wall plate with two slots for accurate wall mounting.

Technical specification

- Suitable for water, max. 50% glycol.
- Temperature range from -10 °C to 120 °C.
- Maximum working pressure is 10 bar and minimum working pressure is 0.2 bar.
- In accordance with ANSI/ASME B1.20.1.
- Application: 97975 only suitable for hydronic systems.
97976 suitable for potable water.

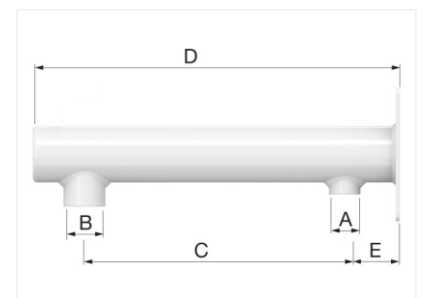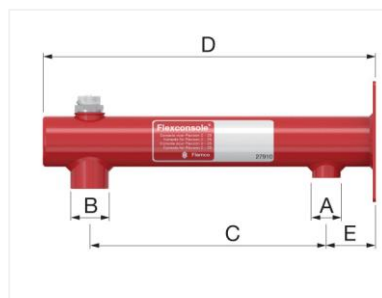

Type	Connection		Dimensions			Color	Material	Order code
	A	B	C ["]	D ["]	E ["]			
Flexconsole 1/2NPT x 1/2NPT	1/2" NPT	1/2" NPT	7,67	10,83	1,61	Red	Steel	97975
Flexconsole 3/4NPT x 1/2NPT SST	1/2" NPT	3/4" NPT	7,67	10,83	1,61	White	Stainless steel	97976

Flamco Group
 Amersfoortseweg 9
 3751 LJ, Bunschoten - Netherlands
 T 033-299 75 00
 F 033-298 64 45
 E info@flamcogroup.com
 I www.flamcogroup.com